WL-4000K



8 meters
Maximum Height

LED
Start and stop at will

Super Silent
62dB

External fuel refilling
Autonomy 80 hours

Maximum 80km/h

360°Manual Rotation

1500 R.P.M

Water-Cooled

General Characteristics

Rated Power (kW/kVA)	2.80/2.8
Maximum Power (kW/kVA)	4.00/4
Rated Current (A)	12.17
Voltage (V)	230
Phase Count	1
Power Factor	1
Frequency (Hz)	50
Cycle (rpm)	1500
Fuel Tank Capacity (l)	75
Fuel Consumption at Full Load (l/h)	1.01
Auxiliary Socket	x2

Tower Properties

Mast Height (m)	8
Number of Lamp	4
Lamp Power (W)	400
Lamp Type	Flat Led


Size And Weight (With Trailer)

Width (mm)	1280
NumbHeight2erofLamp	2965
Altitude (mm)	1880
Telescopic Legs Open Wide (mm)	2290

Standard Properties

Manufacturer reserves the right to make changes in model, technical specifications, color, equipment and accessories without prior notice. 4/28/2026

- Kubota Z482-B-CHN-1 Engine
- Aksa Brand Alternator
- Maximum 8 meters
- 360° manual
- Super silent (62dB at 7m)
- Maximum speed 80km/h
- Single Phase
- 50 Hz Frequency
- 1500 R.P.M
- Water-cooled system
- LED light (available to start and stop at any time)
- Diesel fuel
- Emergency stop
- External fuel refilling
- 4 stabilizers, two of which are extensible to ensure stability
- Spirit level located at the top of genset
- Huge space for maintenance and control
- Power socket provided
- Extensible and tilting mast
- Draw bar with ball coupling
- Includes lifting hooks and bracket holders
- Cabinet with electrophoresis and powder coating process

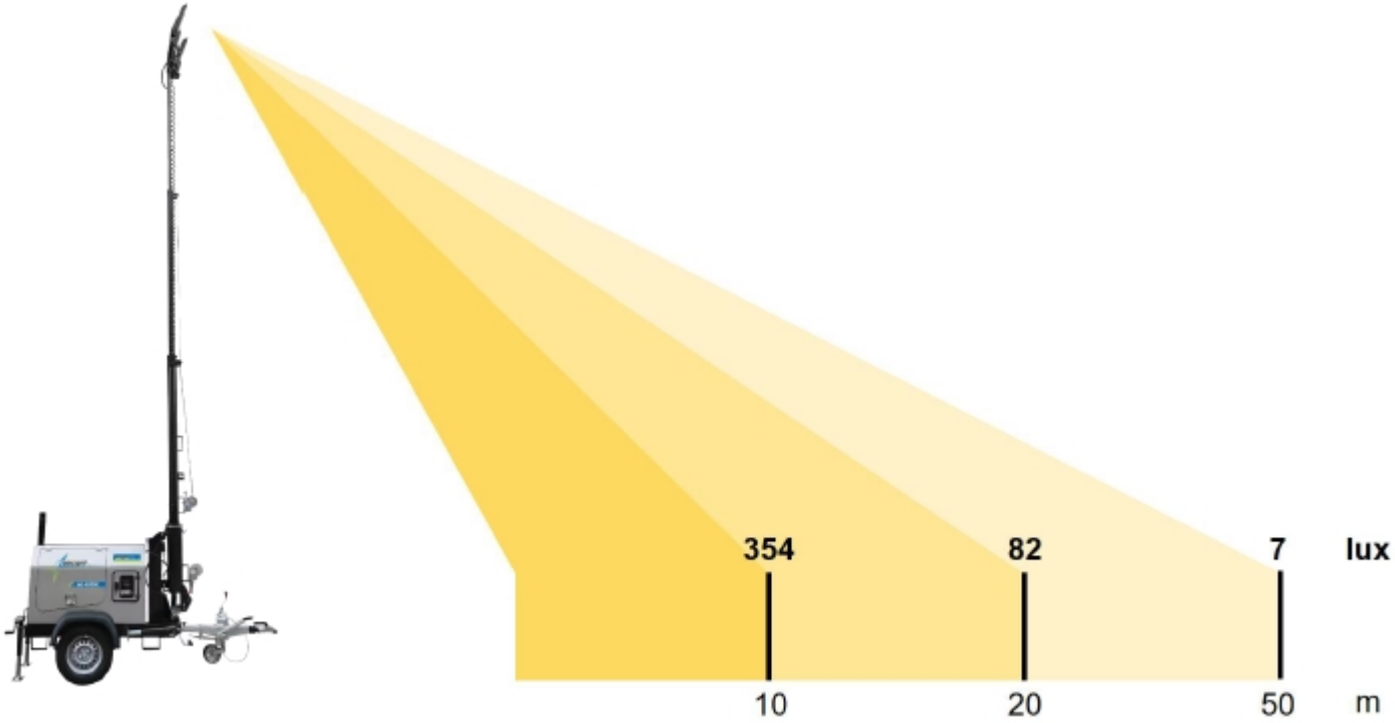

Manufacturer reserves the right to make changes in model, technical specifications, color, equipment and accessories without prior notice. 4/28/2026