maranello alternator

M550

CONT 500 kVA

www.maranellogenerators.com

THREE-PHASE SYNCHRONOUS GENERATOR

Datasheet for 4 poles -50Hz @ 1500rpm/ 60Hz @ 1800rpm

Ambient Temperature	40°C	Method of Cooling	Air cooling
Temperature Rise	125°C	Direction of Rotation	Clockwise
Insulation Class	H	Maximum Over-speed	2250r/min
Power Factor	0.8	Degree of Protection / Enclosure	IP23
Excitation	Brushless	Altitude	1000m
Winding Pitch	2/3	Stator winding	DLL
Pole	4	Number of Terminal	12
Duty	S1- Continuous	Rotor	With damping cage
Waveform	TIF<50	THF<2%	
Waveform distortion	BS EN 61000-6-2&BS EN 61000-6-4,VDE 0875G,VDE0874N		
Radio interference	Noload<1.5%,Non-distorting balanced linear load<5%		

AVR MODEL AVR	Standard	Selection		PMG		
	AS440	KRS440		MX341B	MX321	
Voltage Regulation - in steady state condition	±1.0	±1.0		±0.5	±0.5	
Short Circuit Current Capacity	Control does not sustain a short circuit current			2400A		

Electrical Characteristic

Frequency	Hz	50				60			
Voltage (series star) Y	V	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
Voltage (parallel star) YY	V	190/110	200/115	208/120	220/127	208/120	220/127	230/133	240/138
Voltage (series delta) Δ	V	220	230	240	254	240	254	266	277
Rated power at Class H (125° C) temperature rise	kVA	500	550	500	500	575	594	625	644
	kW	400.0	440.0	400.0	400.0	460.0	475.2	500.0	515.2
Efficiency at Class H (P.F.=0.8)	4/4%	94.4	94.3	94.8	94.9	94.4	94.6	94.7	94.7
	3/4%	95.1	95.1	95.2	95.2	95	95.1	95.1	95.1
	2/4%	95.1	95.1	95	94.9	94.9	94.9	94.9	94.9
Efficiency at Class H (P.F.=1.0)	4/4%	95.6	95.6	95.9	96	95.6	95.8	95.8	95.8
	3/4%	96.2	96.2	96.2	96.2	96	96.1	96.1	96.1
	2/4%	96.1	96.2	96	96	95.9	95.9	96	96
Reactances (%) at Class H									
Direct axis synchronous reactance unsaturated	Xd	3.02	2.99	2.53	2.25	3.52	3.25	3.13	2.96
Direct axis transient reactance saturated	X'd	0.16	0.15	0.13	0.12	0.17	0.16	0.15	0.14
Direct axis subtransient reactance saturated	X"d	0.11	0.11	0.09	0.08	0.12	0.11	0.11	0.1
Quadrature axis synchronous reactance unsaturated	Xq	2.48	2.46	2.08	1.85	2.87	2.65	2.55	2.41
Quadrature axis subtransient reactance saturated	X"q	0.27	0.28	0.23	0.2	0.31	0.29	0.28	0.26
Leakage reactance	X1	0.05	0.04	0.04	0.04	0.06	0.06	0.05	0.05
Negative sequence reactance saturated	X2	0.19	0.19	0.16	0.14	0.22	0.2	0.2	0.19
Zero sequence reactance unsaturated	X0	0.1	0.1	0.08	0.07	0.1	0.09	0.09	0.08
Short-circuit ratio	Kcc	0.3311	0.3344	0.3953	0.4444	0.2841	0.3077	0.3195	0.3378

Short-circuit transient time constant (sec.)	T'd	0.08
Subtransient time constant (sec.)	T"d	0.012
Open circuit time constant (sec.)	T'do	2.2
Armature time constant (sec.)	Tα	0.018
Stator Winding Resistance (20℃)	ohm	0.00485
Rotor Winding Resistance (20℃)	ohm	1.77
Exciter Stator Resistance (20℃)	ohm	17
Exciter Rotor Phase resistance	ohm	0.092

No load excitation current	io (A)	0.6	0.61	0.65	0.65	0.6	0.6	0.62	0.65
Full load excitation current	ic(A)	2.4	2.4	2.5	2.5	2.4	2.4	2.5	2.5
Cooling air requirement	m^3/sec	1.035m3/s 2202cfm				1.312m3/s 2780cfm			

Mechanical Characteristic

Configuration	Single Bearing	Double Bearing
Type of Construction	B2-SAE	IM B34
Total Weight - kgs	1363	1340
Weight wound stator - kgs	635	635
Weight wound rotor - kgs	563	535
Inertia (J) [kgm2]	8.0068kgm2	7.7289kgm2
Drive end bearing / Lubrication		BALL.6220-2RS(ISO)
Non-drive end bearing / Lubrication	BALL.6314-2RS(ISO)	BALL.6314-2RS(ISO)
Packing crate size（cm）	138X80X115	149X80X115


Winding 311 0.8 Power Factor

RATINGS

	Class - Temp Rise	Cont. F - 105/40°C				Cont. H - 125/40°C				Standby - 150/40°C				Standby - 163/27°C			
50 Hz	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Parallel Star (V)	190	200	208	220	190	200	208	220	190	200	208	220	190	200	208	220
	Series Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
	kVA	450	495	450	450	500	550	500	500	515	575	515	515	550	590	550	530
	kW	360	396	360	360	400	440	400	400	412	460	412	412	440	472	440	424
	Efficiency (%)	94.8	94.7	95.0	95.1	94.5	94.3	94.8	94.9	94.4	94.1	94.7	94.9	94.1	94.0	94.5	94.8
	kW Input	380	418	379	379	423	467	422	421	436	489	435	434	468	502	466	447

60 Hz	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Parallel Star (V)	208	220	230	240	208	220	230	240	208	220	230	240	208	220	230	240
	Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
	kVA	519	538	563	588	575	594	625	644	588	625	655	675	606	644	673	694
	kW	415	430	450	470	460	475	500	515	470	500	524	540	485	515	538	555
	Efficiency (%)	94.7	94.8	94.9	94.9	94.5	94.6	94.6	94.7	94.4	94.4	94.5	94.5	94.3	94.3	94.4	94.4
	kW Input	438	454	475	496	487	502	529	544	498	530	554	571	514	546	570	588

DIMENSIONS

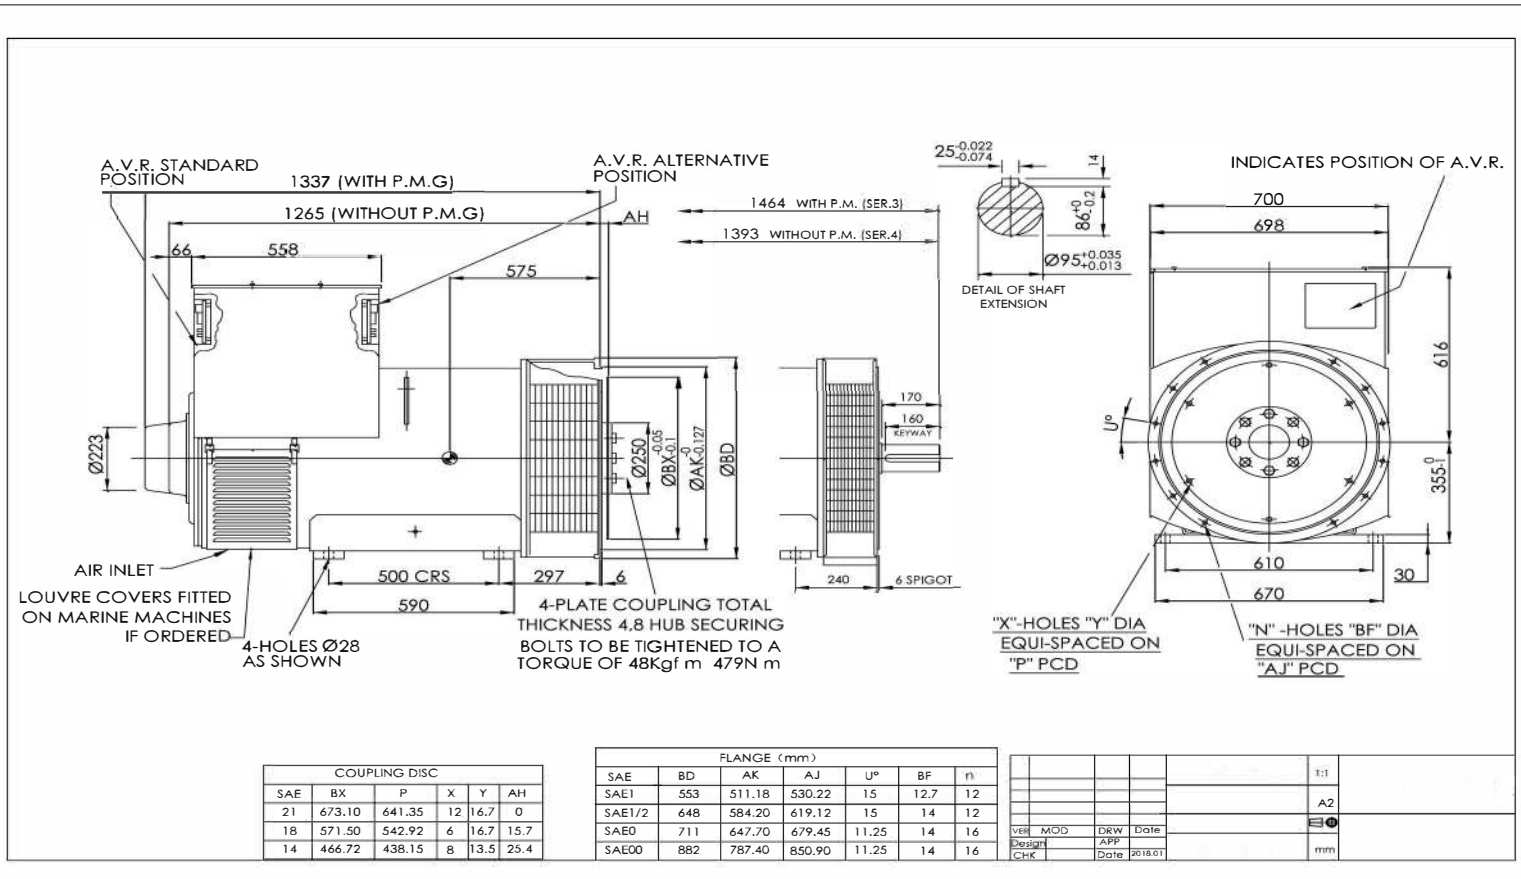

COUPLING DISC					
SAE	BX	P	X	Y	AH
21	673.10	641.35	12	16.7	0
18	571.50	542.92	6	16.7	15.7
14	466.72	438.15	8	13.5	25.4


FLANGE (mm)						
SAE	BD	AK	AJ	U°	BF	n
SAE1	553	511.18	530.22	15	12.7	12
SAE1/2	648	584.20	619.12	15	14	12
SAE0	711	647.70	679.45	11.25	14	16
SAE00	882	787.40	850.90	11.25	14	16


VER	MOD	DRW	Date		1:1
Design		APP			A2
CHK		Date	2018.01		mm


50 Hz


Winding 311

THREE PHASE EFFICIENCY CURVES

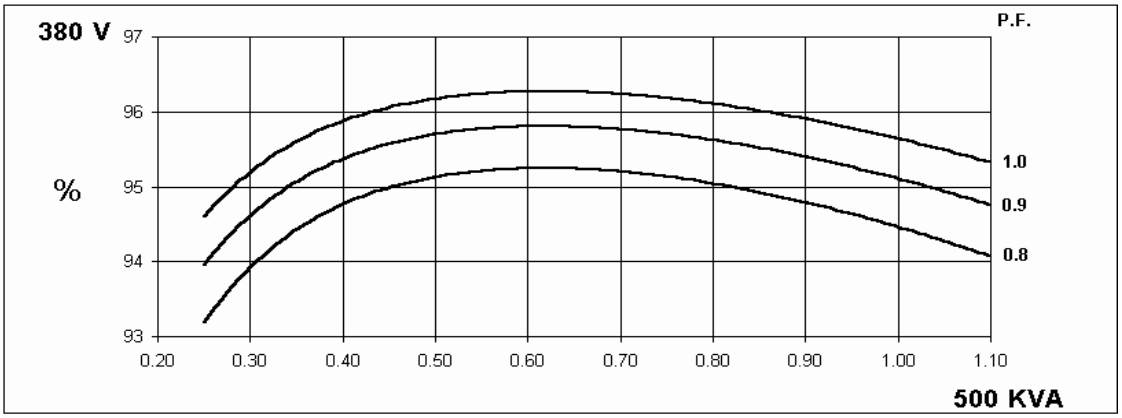

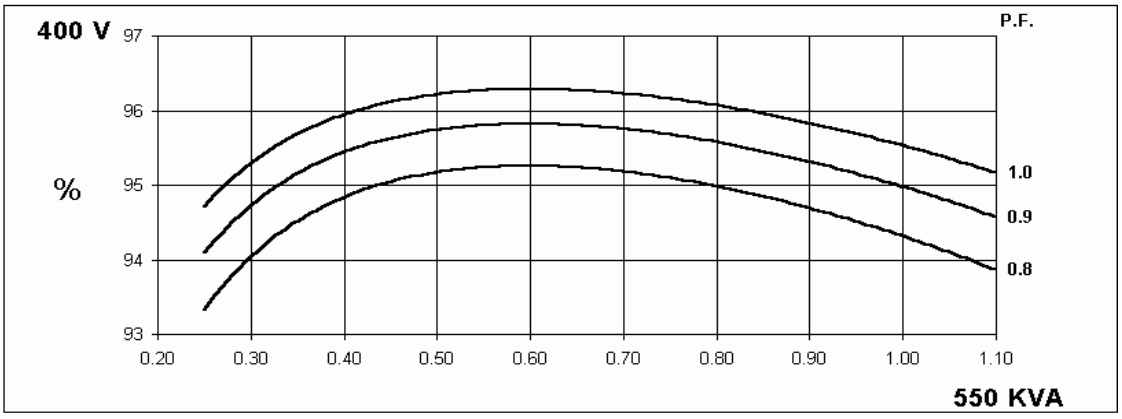

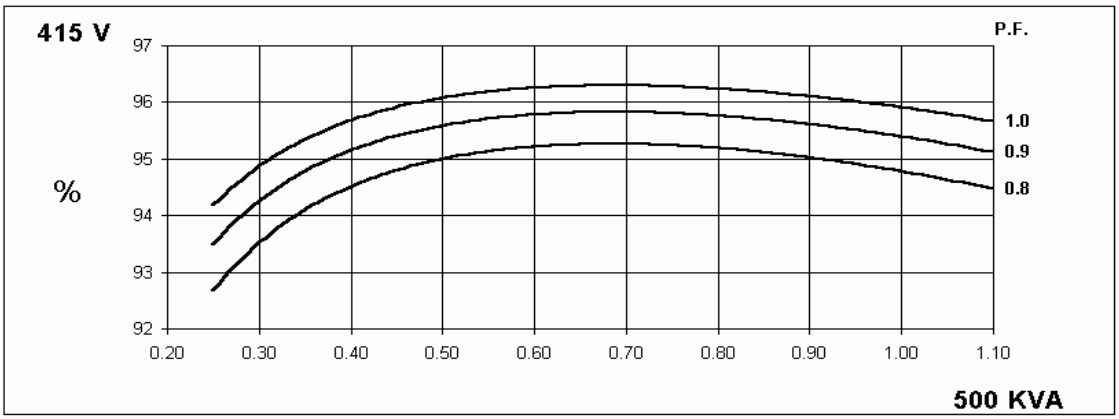


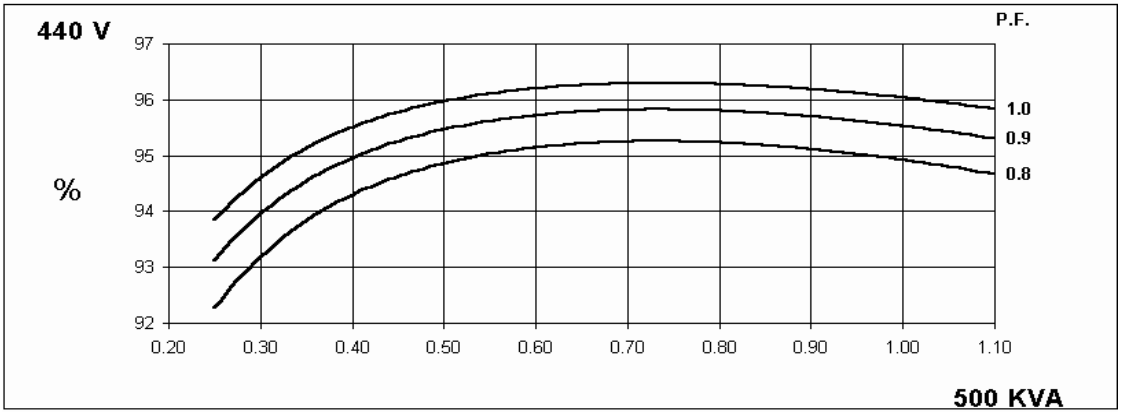



60 Hz


Winding 311

THREE PHASE EFFICIENCY CURVES

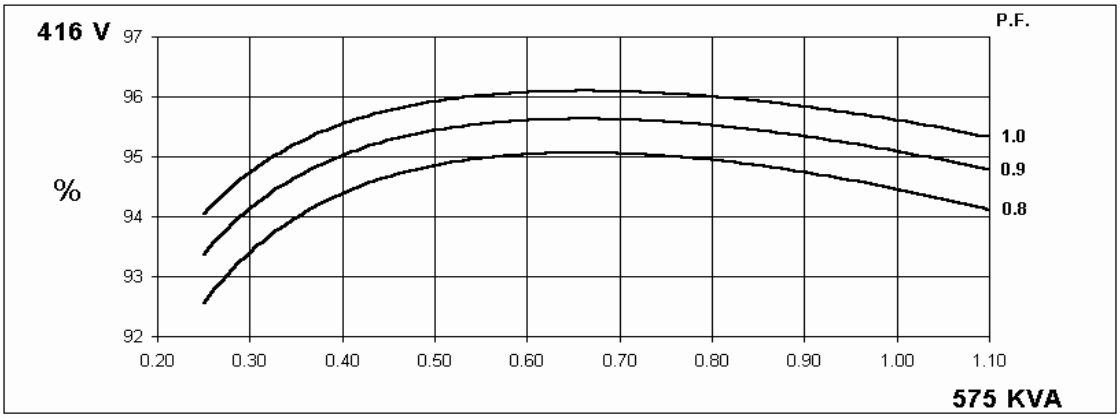

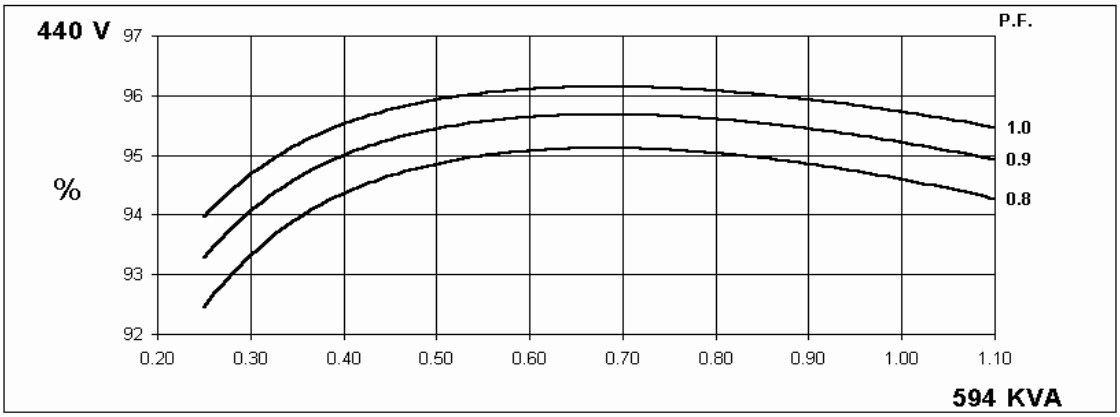


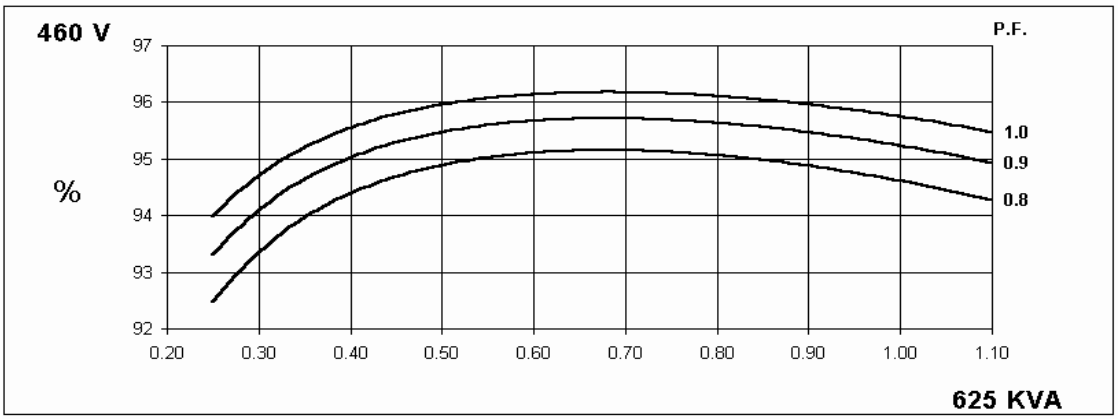

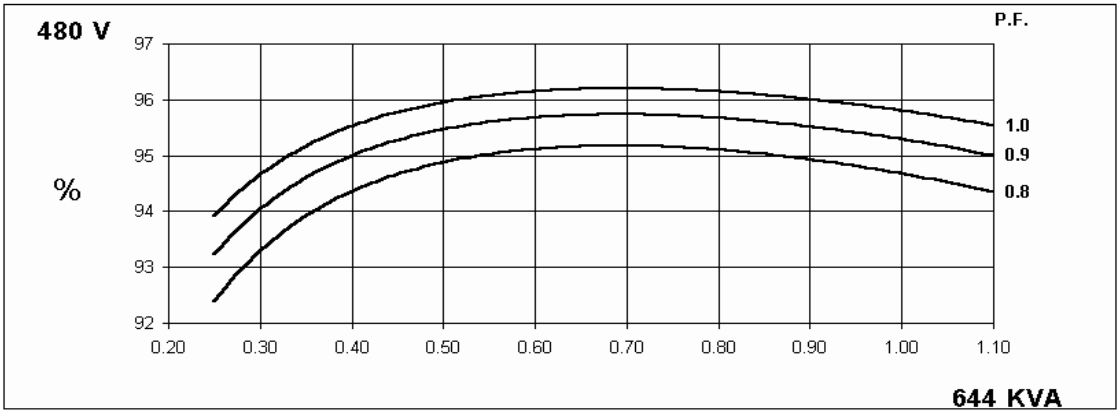


Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed
Based on star (wye) connection.

50 Hz

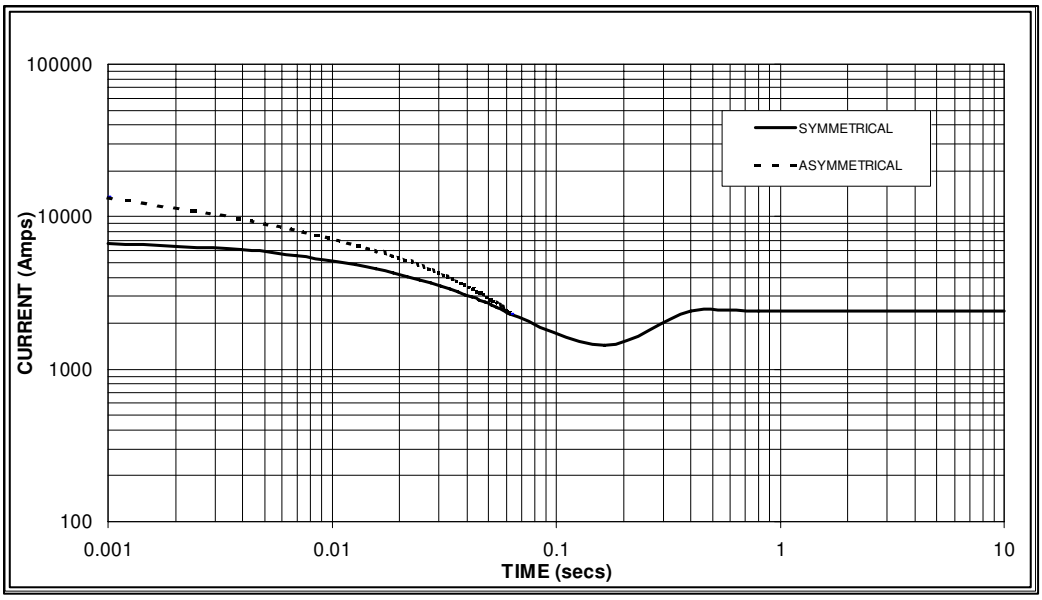

Sustained Short Circuit = 2,400 Amps

60 Hz

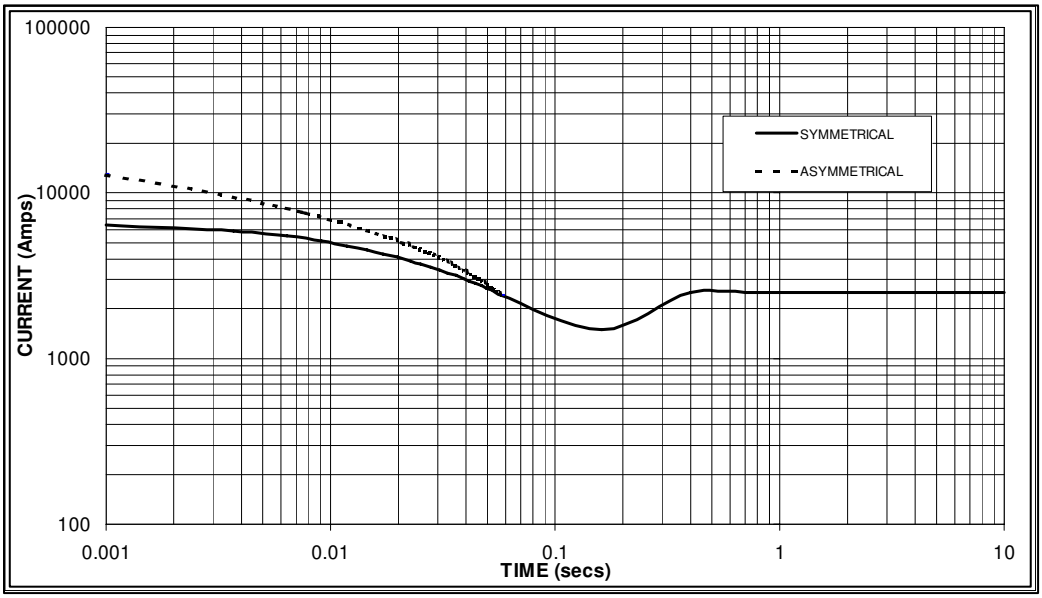

Sustained Short Circuit = 2,500 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380v	X 1.00	416v	X 1.00
400v	X 1.06	440v	X 1.06
415v	X 1.09	460v	X 1.12
440v	X 1.12	480v	X 1.20

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.


All other times are unchanged

Note 3

Curves are drawn for Star (Wye) connected machines. For other connections the following multipliers should be applied to current values as shown :

Parallel Star = Curve current value X 2

Series Delta = Curve current value X 1.732

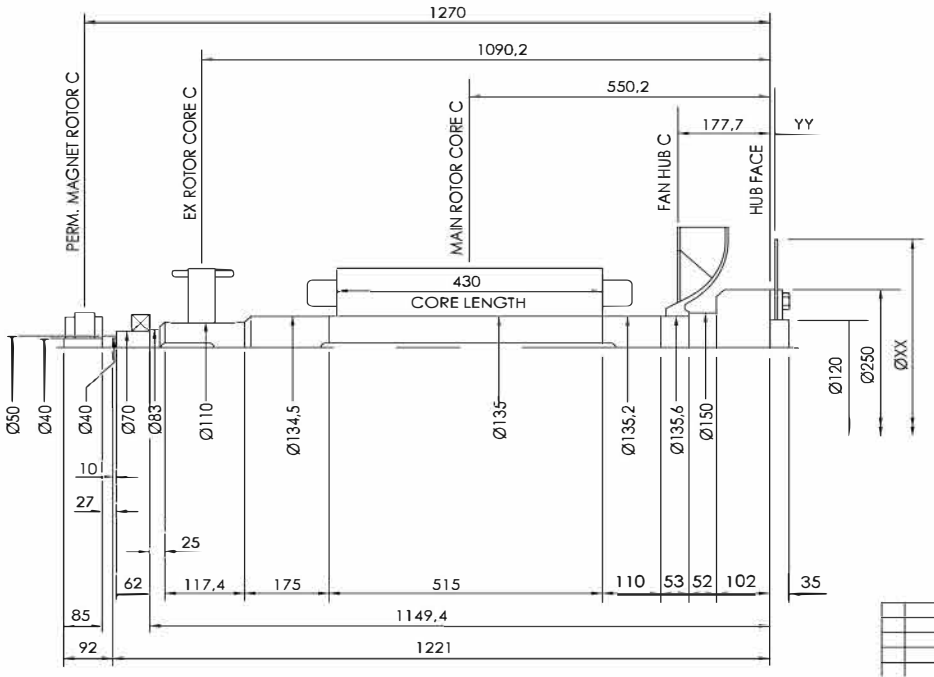

COMPONENT	Wt kg	J kgm^2
EX. ROTOR	31,290	0,5100
MAIN ROTOR	358.09	6.553
FAN	12.53	0,393
SHAFT	129.664	0,287
HUB	23.922	0,2455
TOTAL	555.496	7.9885
PERM. MAG.	7.899	0,0183
TOTAL	563.395	8.0068

COUPLING SAE No	COUPLING DIMEN's		COUPLING ASSEMBLY WEIGHT kg	COUPLING DISC J kgm^2
	XX	YY		
11,5	352	23,8	12,08	0,055
14	467	9,5	11,66	0,172
18	572	0,0	12,07	0,386

					1:1
VER	MOD	DRW	Date		
Design		APP			
CHK		Date	2018.01		mm



Şerifali, Tavukçuyolu Cd No:200, 34775 Ümraniye/İstanbul
+90 216 312 79 79
www.maranellogenerators.com
info@maranellogenerators.com